

SOLAR PANEL

MONOCRYSTALLINE

4SUN-FLEX-M

60WPrestigeNarrow

Index: P0130

60W

Maximum power

22%

Cell efficiency

+3%

Power tolerance



• 2-year warranty on
workmanship


4sun®

TECHNICAL DATA

Model	4SUN-FLEX-M 60W Prestige Narrow
Cell Type	SUNPOWER Monocrystalline
Peak Power (Pmax) [W]	60
Power Tolerance [%]	+3%
Max. Power Voltage (Vmp) [V]	19,20
Max. Power Current (Imp) [A]	3,18
Open Circuit Voltage (Voc) [V]	23,04
Short Circuit Current (Isc) [A]	3,44
Length [mm]	1060
Width [mm]	280
Width [mm]	3
Weight [kg]	1,05
Terminal	MC4
Maximum system voltage	600V DC
Cables	900mm / 2×2.5mm ²
Terminal	MC4
Working temperature	-40°C ~ +85°C

*Parameters are specified under STC conditions: 1000 W/m²; 25 degrees C; AM 1.5.

TECHNICAL DRAWING (mm)

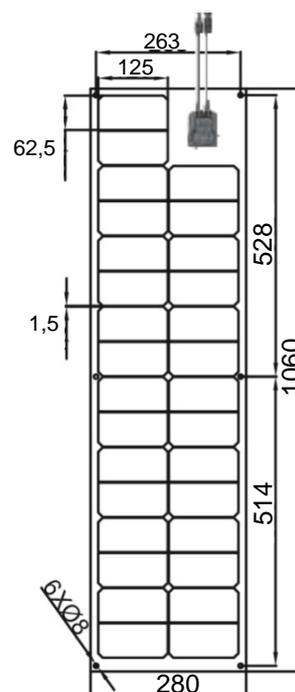

The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be ±5mm.