


Parallel connector SY-BY21-A/B elastyczny



IEC 1000V
UL 1000V

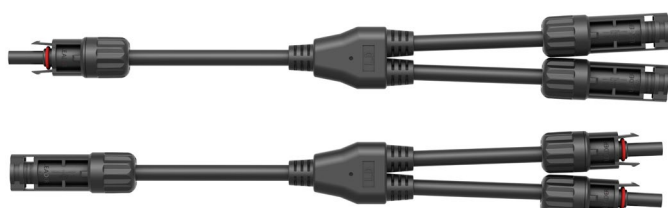

UL94-V0



-40°C~85°C



IP 67



Technical data

Nominal voltage	1000V
Nominal current	Max 30A
Ambient temperature	-40°C to +85 °C
Connection resistance	≤0.05mΩ
Pollution class	Class II
Security class	Class II
Fire resistance	UL94-V0
Nominal impulse voltage	16KV
Product code	A0012

Specification

The SY-BY21-A/B connectors use high-quality materials to guarantee long-term reliability. Lower connection resistance and increased current flow ensure high product efficiency. The SY-BY21-A/B connectors are IP67 rated and can be used over a wide temperature range from -40 °C to 85 °C.

