

# SOLAR PANEL

MONOCRYSTALLINE

## 4SUN-FLEX-M 160W Prestige

Index: P0174

**160W**


Maximum power

**22%**

Cell efficiency

**+3%**

Power tolerance

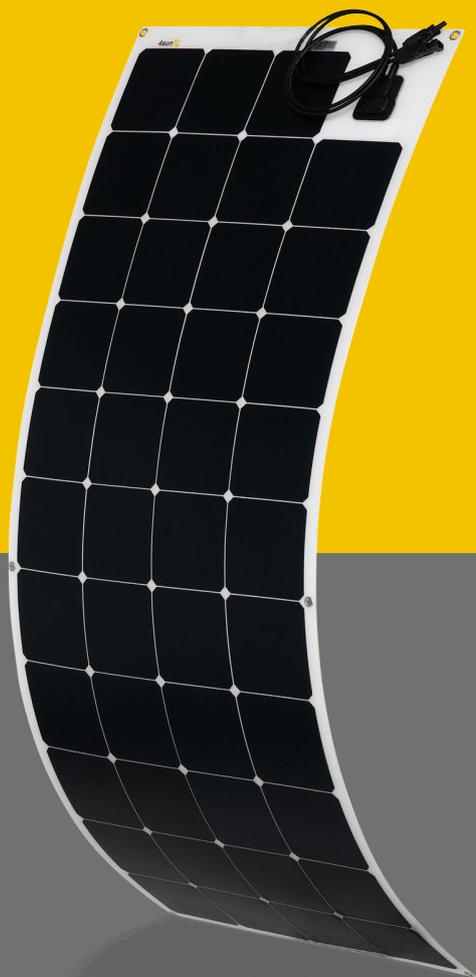

• 2-year warranty on  
workmanship


# 4sun®

### TECHNICAL DATA

Model	4SUN-FLEX-M ETFE 160W Prestige PCB
Cell Type	SUNPOWER Monokrystaliczne
Peak Power (Pmax) [W]	160
Power Tolerance [%]	+3%
Max. Power Voltage (Vmp) [V]	26,80
Max. Power Current (Imp) [A]	5,97
Open Circuit Voltage (Voc) [V]	32,16
Short Circuit Current (Isc) [A]	6,57
Length [mm]	1445
Width [mm]	540
Depth [mm]	3,2
Weight [kg]	3,2
Terminal	MC4
Maximum system voltage	600V DC
Cables	900mm / 2×4,0mm <sup>2</sup>
Terminal	MC4
Working temperature	-40°C ~ +85°C

\*Parameters are specified under STC conditions: 1000 W/m<sup>2</sup>; 25 degrees C; AM 1.5.

### TECHNICAL DRAWING (mm)

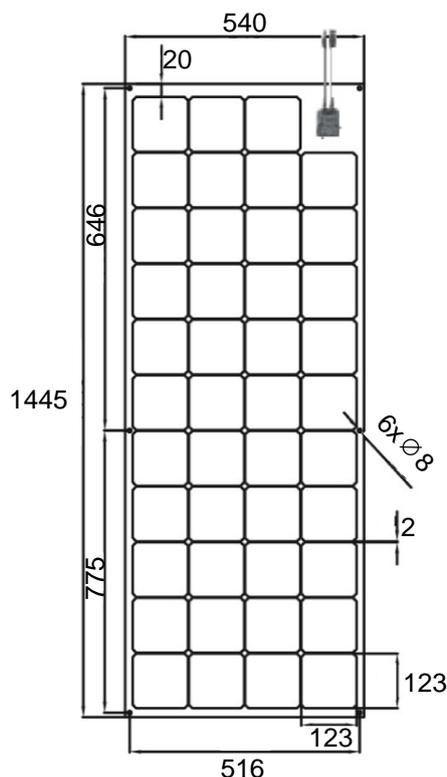

The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be ±5mm.