

SOLAR PANEL

MONOCRYSTALLINE

4SUN-FLEX-M-ETFE

190W MAXX

Product code: P0134

190W

Maximum power

22%

Cell efficiency

+3%

Power tolerance




TECHNICAL DATA

Model type	4SUN-FLEX 190W MAXX
Cell type	Monocrystalline
Peak power (Pmax) [W]	190
Power tolerance [%]	+3%
Max. Power Voltage (Vmp) [V]	19,50
Max. Power Current (Imp) [A]	9,74
Open Circuit Voltage [V]	23,40
Short Circuit Current (Isc) [A]	10,70
Length [mm]	1480
Width [mm]	665
Depth [mm]	3
Weight [kg]	3,2
Terminal	MC4
Maximum system voltage	600VDC (IEC)
Output cables	900mm / 2×4mm ²
Terminal	MC4
Working temperature	-40°C ~ +85°C

*Parameters are specified in STC conditions: 1000 W/m²; 25 °C; AM 1.5.

TECHNICAL DRAWING (mm)

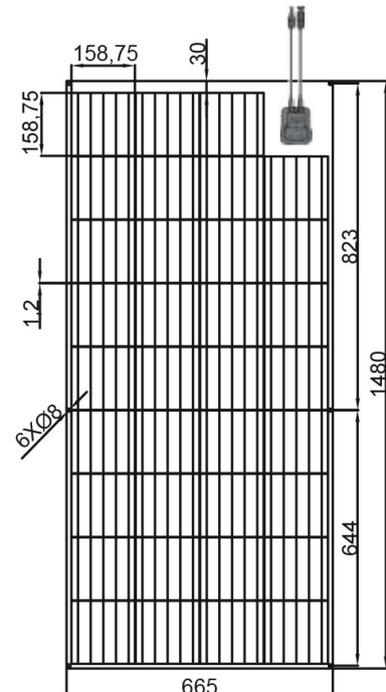

The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be ±5mm.

• 2 years workmanship warranty

