

GEL BATTERY 26Ah MAXX

12V **26Ah**
Voltage Capacity




MAXX


TECHNICAL DATA

INDEX	B0011
MODEL	26Ah MAXX
Nominal voltage [V]	12
Nominal capacity [Ah]	26
Standard terminal	T6
Length [mm]	165
Width [mm]	125
Housing height [mm]	174
Overall height [mm]	174
Weight [kg]	7,80
Cyclic charging [V]	14,4-14,9
Buffer charge [V]	13,5-13,8
Self-discharge within 3 months	91%
Self-discharge within 6 months	82%
Self-discharge within 12 months	64%
Internal resistance [mΩ]	8

BATTERY LIFE

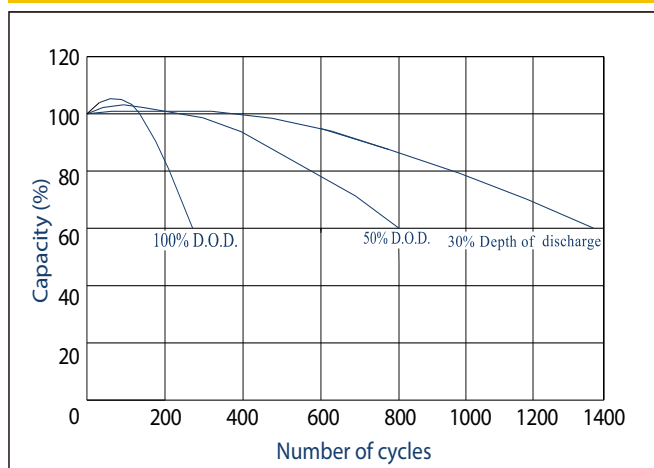


DISCHARGE CHARACTERISTICS

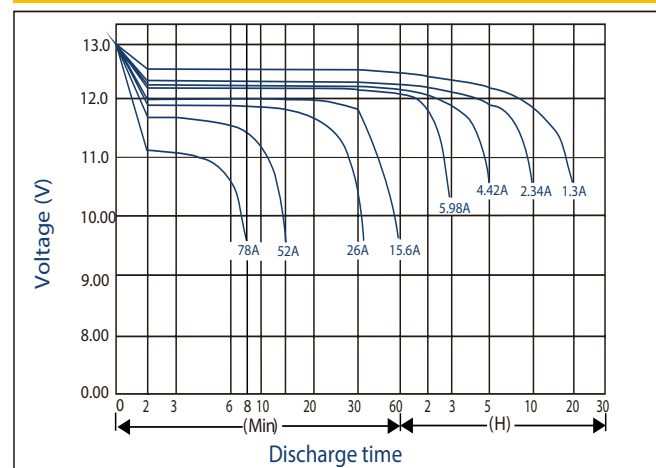


TYPE OF TERMINAL

Standard terminal (T6)



(in mm)

TECHNICAL FIGURE (mm)

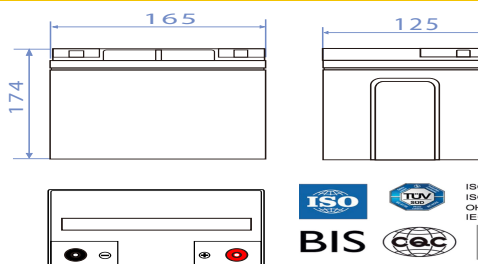

CONSTANT-CURRENT (25°C) CONSTANT-POWER (AT 25°C) DISCHARGE TABLE

time		5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9,60V	A	112,00	75,60	53,20	32,20	16,80	9,80	7,20	5,77	4,90	3,22	2,66	1,428
	W	1189,4	802,9	565,0	341,3	193,5	112,9	83,26	66,85	56,79	37,32	30,86	16,78
10,20V	A	100,80	68,74	47,88	30,52	15,68	9,38	7,03	5,60	4,79	3,16	2,60	1,428
	W	1118,9	763,0	531,0	339,4	181,6	108,6	81,38	64,96	55,68	36,80	30,28	16,61
10,50V	A	95,20	65,52	44,80	29,62	15,23	9,21	6,92	5,35	4,73	3,16	2,60	1,400
	W	1078,6	742,3	507,6	335,9	176,7	106,9	80,23	62,04	54,89	36,70	30,21	16,31
10,80V	A	88,65	62,10	42,00	28,81	14,76	8,96	6,78	5,24	4,54	3,05	2,49	1,372
	W	1030,1	721,6	488,0	334,8	171,5	104,1	78,74	60,84	52,94	35,86	29,28	16,01
11,10V	A	84,00	58,80	39,20	28,00	14,25	8,76	6,41	5,10	4,34	3,00	2,44	1,305
	W	999,6	699,7	466,5	333,2	169,6	104,3	76,43	60,74	51,73	35,71	29,04	15,55

The electrical parameters indicated on the product label may differ slightly from the specifications.



4Sun sp. z o.o. sp.k.

Annopol 4, 03-236 Warszawa

tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu