

SOLAR PANEL MONOCRYSTALLINE 200W MAXX

36 cells
Monocrystalline

200w
Maximum power




MAXX

TECHNICAL DATA

INDEX	P0176
MODEL TYPE	200W MAXX
Peak Power (Pmax) [W]	200
Maximum Power Voltage (Vmp) [V]	23,20
Maximum Power Current (Imp) [A]	8,63
Open Circuit Voltage (Voc) [V]	27,95
Short Circuit Current (Isc) [A]	9,26
Maximum System Voltage	500VDC(IEC)
Power Tolerance	+3%
Cell Type	Monocrystalline
Dimensions [mm]	1100*890*30
Weight [kg]	10,2
Outputcables	2x4mm ² MC4
Warranty	5 years
Bus Bar	12BB
Junction box	IP67
Front Glass (tempered glass)	3,2mm
Frame	black

TECHNICAL DRAWING (mm)

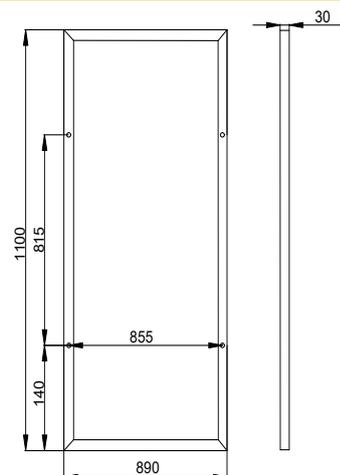


The dimensions given are measured to the center of the mounting hole.


Differences between individual batches may be ± 5 mm.

CHARACTERISTIC

current-voltage



power-voltage



ISO9001
ISO14001
OHSAS18001
IEC TS 62941



BIS



The electrical parameters listed on the product label may differ slightly from the specifications.

4sun

4Sun sp. z o.o. sp.k.
Annopol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu