

SOLAR PANEL MONOCRYSTALLINE 200W BF MAXX HC

64 cells
Monocrystalline

200W
Maximum power




MAXX

TECHNICAL DATA

INDEX	P0182
MODEL TYPE	200W BF Maxx
Peak Power (Pmax) [W]	200
Maximum Power Voltage (Vmp) [V]	18.1
Maximum Power Current (Imp) [A]	11,05
Open Circuit Voltage (Voc) [V]	21,72
Short Circuit Current (Isc) [A]	11,95
Maximum System Voltage	1000VDC(IEC)
Power Tolerance	0~+3W
Cell Type	Monocrystalline
Dimensions [mm]	1410x700x35
Weight [kg]	9,4
Output cables	30cm 2x4.0mm ²
Warranty	5 years
Bus Bar	12BB
Junction box	IP68
Front Glass (tempered glass)	3,2mm
Frame	black


TECHNICAL DRAWING (mm)

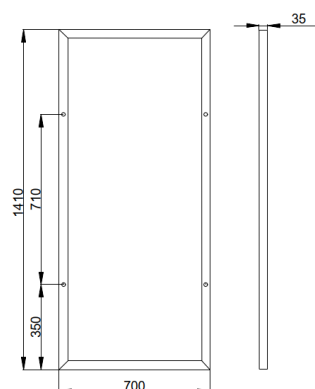

The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be $\pm 5\text{mm}$.

CHARACTERISTIC

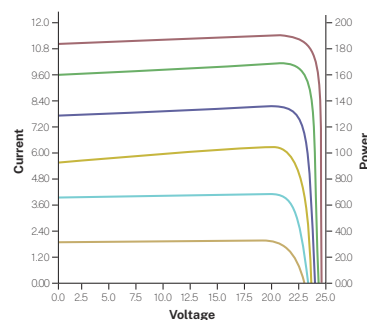

ISO9001
ISO14001
OHSAS18001
IEC TS 62941



BIS



The electrical parameters listed on the product label may differ slightly from the specifications.

4sun

4Sun sp. z o.o. sp.k.

Annopol 4, 03-236 Warszawa

tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu