

SOLAR PANEL MONOCRYSTALLINE

75W MAXX

36 cells
Monocrystalline

75W
Maximum power




MAXX

TECHNICAL DATA

INDEX	P0198
MODEL	75W Maxx
Peak Power (Pmax) [W]	75
Maximum Power Voltage (Vmp) [V]	19,30
Maximum Power Current (Imp) [A]	3,89
Open Circuit Voltage (Voc) [V]	23,16
Short Circuit Current (Isc) [A]	4,20
Maximum System Voltage	1000VDC(IEC)
Power Tolerance	+3%
Cell Type	Monocrystalline
Dimensions [mm]	740x540x25
Weight [kg]	4,80
Output cables	90cm 2x2,5mm MC4
Warranty	5 years
Bus Bar	5BB
Junction box	IP65
Front Glass (tempered glass)	3,2mm
Frame	black

TECHNICAL DRAWING (mm)

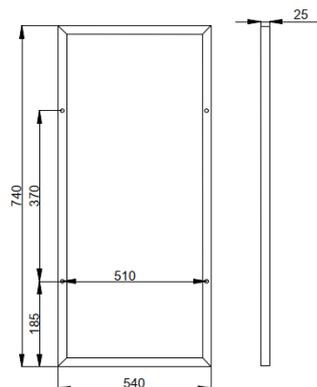

The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be ± 5 mm.



ISO9001
ISO14001
OHSAS18001
IEC TS 62941




BIS




The electrical parameters listed on the product label may differ slightly from the specifications.

CHARACTERISTIC

current-voltage



power-voltage



4sun®

4Sun sp. z o.o. sp.k.
Annapol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu