


SOLAR PANEL MONOCRYSTALLINE

10W MAXX

36 cells
Monocrystalline

10W
Maximum power

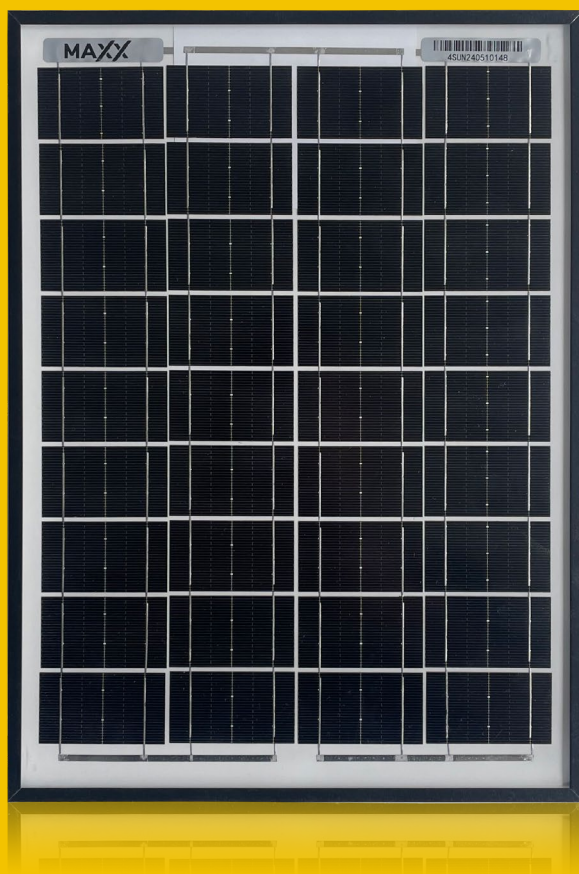


MAXX

TECHNICAL DATA

	P200
TYPE	10W Maxx
Peak Power (Pmax) [W]	10
Maximum Power Voltage (Vmp) [V]	18,70
Maximum Power Current (Imp) [A]	0,54
Open Circuit Voltage (Voc) [V]	22,40
Short Circuit Current (Isc) [A]	0,59
Maximum System Voltage	1000VDC(IEC)
Power Tolerance	+3%
Cell Type	Monocrystalline
Dimensions [mm]	330x240x17
Weight [kg]	1,25
Output cables	2x90mm without MC4
Warranty	5 years
Bus Bar	5BB
Junction box	IP65
Glass thickness (tempered glass)	3,2mm
Frame	black

TECHNICAL DRAWING (mm)

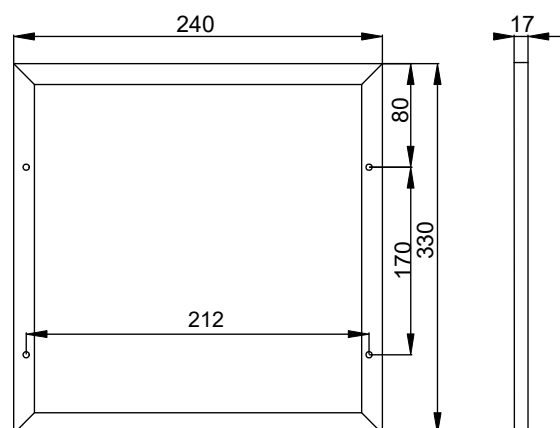

The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be ± 5 mm.



ISO9001
ISO14001
OHSAS18001
IEC TS 62941




BIS



The electrical parameters listed on the product label may differ slightly from the specifications.

CHARACTERISTIC

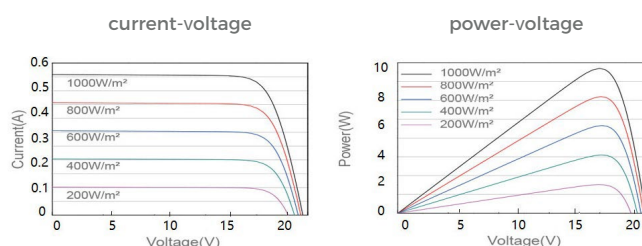

4sun

4Sun sp. z o.o. sp.k.
Annapol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu