

SOLAR PANEL

MONOCRYSTALLINE

190W BF MAXX

34 cells
Monocrystalline

190W
Maximum power




MAXX

DANE TECHNICZNE

INDEX	P0206
MODEL	190W Bifacial
Peak Power (Pmax) [W]	190
Maximum Power Voltage (Vmp) [V]	22,52
Maximum Power Current (Imp) [A]	8,44
Open Circuit Voltage (Voc) [V]	27,02
Short Circuit Current (Isc) [A]	8,95
Maximum System Voltage	1000VDC(IEC)
Power Tolerance	+3%
Cell Type	Monocrystalline
Dimensions [mm]	1485x668x30
Weight [kg]	11
Output cables	90cm 2x4mm
Warranty	5 years
Bus Bar	12BB
Junction box	IP65
Front Glass (tempered glass)	3,2mm
Frame	black


TECHNICAL DRAWING (mm)

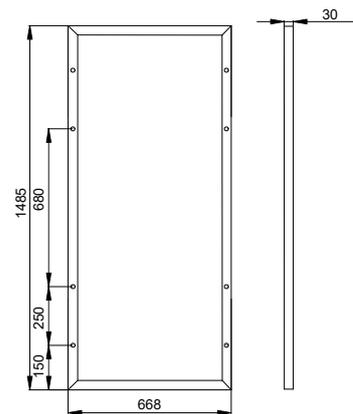

The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be ± 5 mm.

CHARACTERISTIC

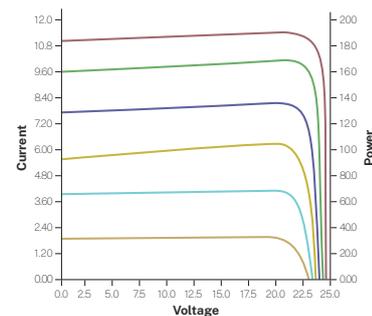

ISO9001
ISO14001
OHSAS18001
IEC TS 62941



BIS



The electrical parameters listed on the product label may differ slightly from the specifications.

4sun

4Sun sp. z o.o. sp.k.
Annopol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu