


SOLAR PANEL MONOCRYSTALLINE

100W MAXX

36 cells
Monocrystalline

100W
Maximum power

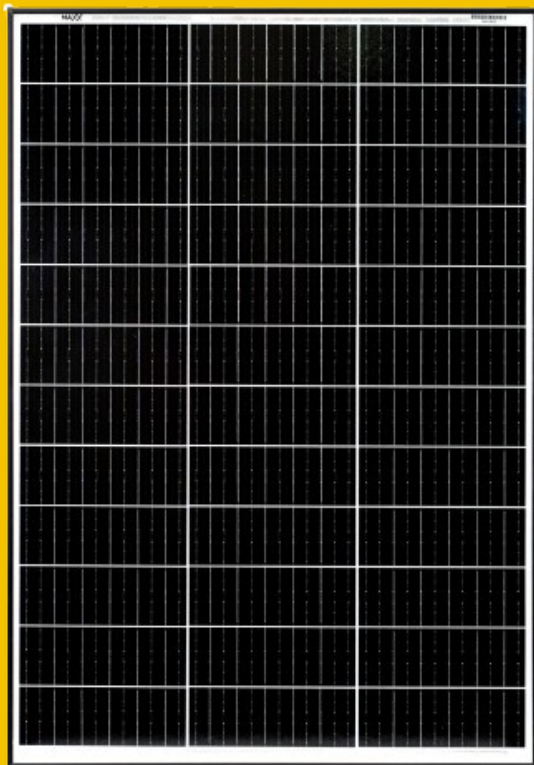


MAXX

TECHNICAL DATA

INDEX	P0007
MODEL TYPE	100W Maxx
Peak Power (Pmax) [W]	100
Maximum Power Voltage (Vmp) [V]	18
Maximum Power Current (Imp) [A]	5,56
Open Circuit Voltage (Voc) [V]	21,6
Short Circuit Current (Isc) [A]	6,12
Maximum System Voltage	1000VDC(IEC)
Power Tolerance	+3%
Cell Type	Monocrystalline
Dimensions [mm]	910x670x30
Weight [kg]	6,3
Output cables	90cmx2x4.0mm MC4
Warranty	5 years
Bus Bar	5BB
Junction box	IP65
Front Glass (tempered glass)	3,2mm
Frame	black

TECHNICAL DRAWING (mm)

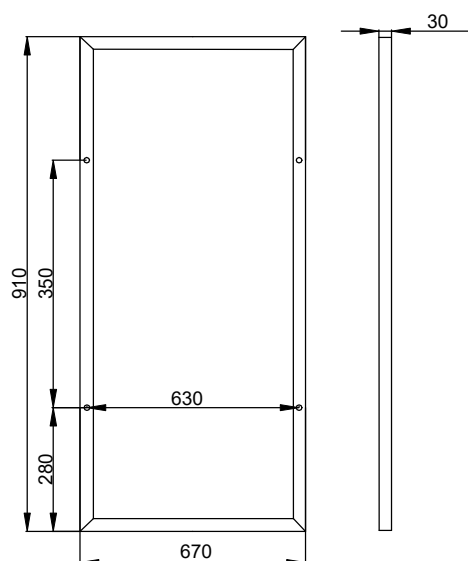

CHARACTERISTIC




ISO9001
ISO14001
OHSAS18001
IEC TS 62941




BIS



current-voltage



power-voltage



The electrical parameters listed on the product label may differ slightly from the specifications.

4sun®

4Sun sp. z o.o. sp.k.
Annopol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu