

SOLAR PANEL


MONOCRYSTALLINE

240W BF MAXX

BIFACIAL TB

64 cells
Monocrystalline

240W
Maximum power

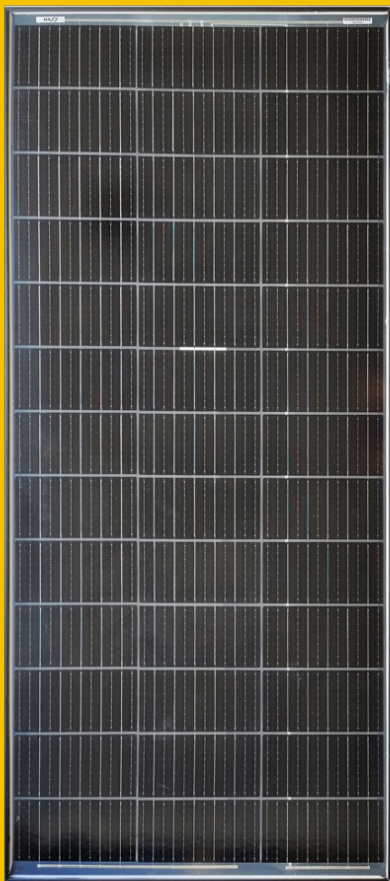


MAXX


DANE TECHNICZNE

INDEX	P0207
MODEL	240W BF Bifacial
Peak Power (Pmax) [W]	240
Maximum Power Voltage (Vmp) [V]	18,75
Maximum Power Current (Imp) [A]	12,79
Open Circuit Voltage (Voc) [V]	22,51
Short Circuit Current (Isc) [A]	13,94
Maximum System Voltage	1000VDC(IEC)
Power Tolerance	0~+3W
Cell Type	Monocrystalline
Dimensions [mm]	1540x770x30
Weight [kg]	13,5
Output cables	30cm 2x4mm
Warranty	5 years
Bus Bar	12BB
Junction box	IP68
Front Glass (tempered glass)	3,2mm
Frame	black

TECHNICAL DRAWING (mm)

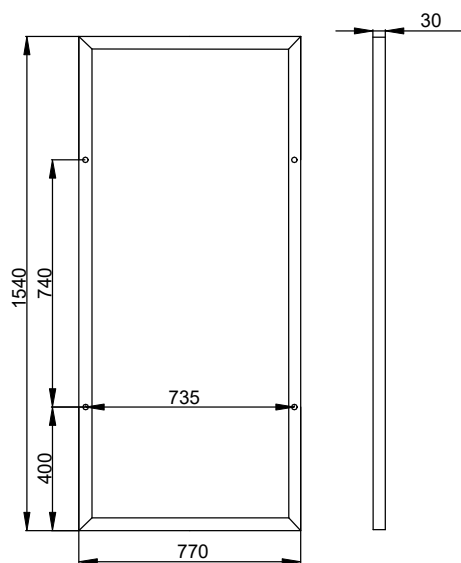

CHARACTERISTIC

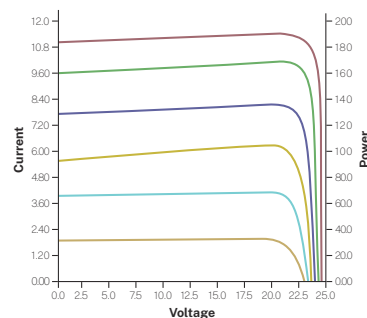

ISO9001
ISO14001
OHSAS18001
IEC TS 62941



BIS



The electrical parameters listed on the product label may differ slightly from the specifications.

4sun

4Sun sp. z o.o. sp.k.
Annopol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu