

# SOLAR PANEL

MONOCRYSTALLINE

## 4SUN PRESTIGE FLEX 20W

Product code: P0210

**20W**

Maximum power

**24%**

Cell efficiency

**0~3W**

Power tolerance



• 2-year warranty on  
workmanship


# 4sun®

### TECHNICAL DATA

Model	4SUN PRESTIGE FLEX 20W
Cell Type	SUNPOWER Monocrystalline
Peak Power (Pmax) [W]	20
Power Tolerance [W]	0~3
Max. Power Voltage Vmp [V]	19,80
Max. Power Current Imp [A]	1,01
Open Circuit Voltage Voc [V]	23,76
Short Circuit Current Isc [A]	1,11
Length [mm]	445
Width [mm]	277
Depth [mm]	3
Weight [kg]	0,30
Number of cells	36
Maximum system voltage	600V DC
Cables	90cm / 2×2.5mm <sup>2</sup>
Terminal	MC4
Working temperature	-40°C ~ +85°C

\*Parameters are specified under STC conditions: 1000 W/m<sup>2</sup>; 25 degrees C;  
AM 1.5.

### TECHNICAL DRAWING (mm)

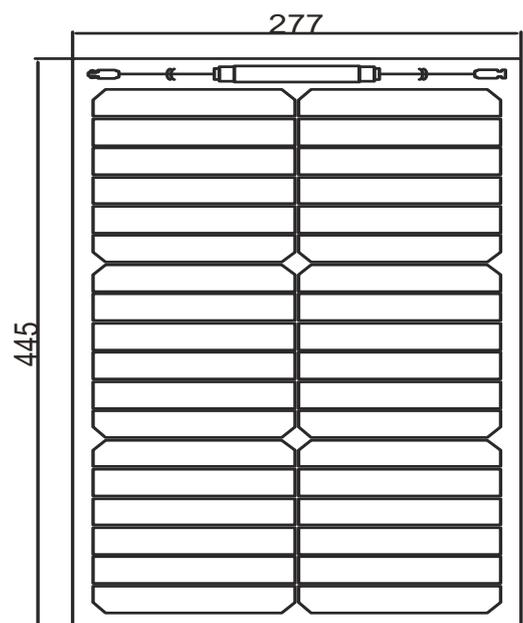

The dimensions given are measured to the center of the  
mounting hole.

Differences between individual batches may be ±5mm.