

SOLAR PANEL

MONOCRYSTALLINE

4SUN PRESTIGE FLEX 40W

Product code: P0212

40W

Maximum power

24%

Cell efficiency

0~3W

Power tolerance



• 2-year warranty on
workmanship


4sun®

TECHNICAL DATA

Model	4SUN PRESTIGE FLEX 40W
Cell Type	SUNPOWER Monocrystalline
Peak Power (Pmax) [W]	40
Power Tolerance [W]	0~3
Max. Power Voltage Vmp [V]	18,10
Max. Power Current Imp [A]	2,21
Open Circuit Voltage Voc [V]	21,72
Short Circuit Current Isc [A]	2,43
Length [mm]	520
Width [mm]	400
Depth [mm]	3
Weight [kg]	0,60
Number of cells	32
Maximum system voltage	600V DC
Cables	90cm / 2×2.5mm ²
Terminal	MC4
Working temperature	-40°C ~ +85°C

*Parameters are specified under STC conditions: 1000 W/m²; 25 degrees C; AM 1.5.

TECHNICAL DRAWING (mm)

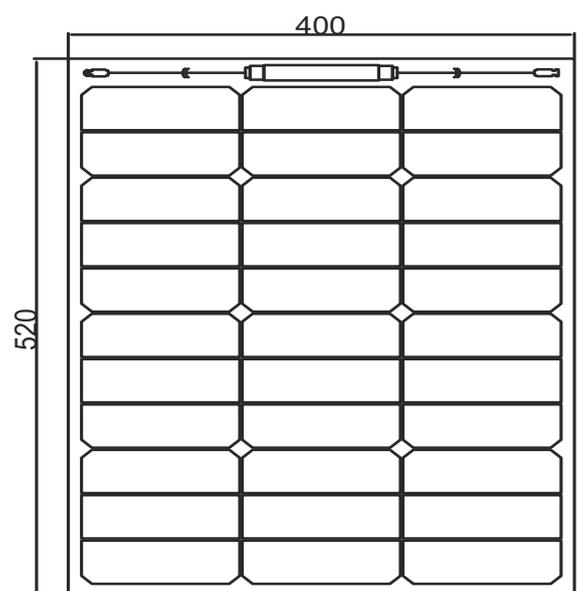

The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be ±5mm.