


SOLAR PANEL POLICRYSTALLINE

280W MAXX

60 cells
Polycrystalline

280W
Maximum power

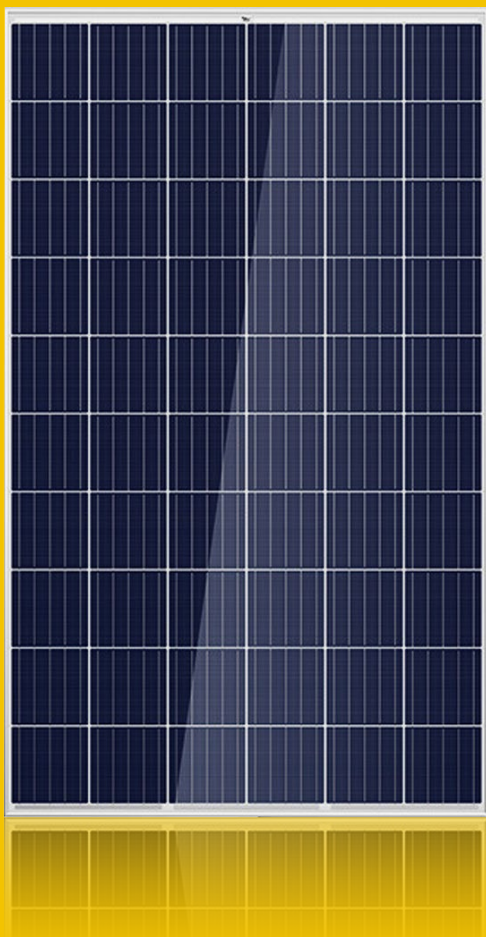


MAXX


TECHNICAL DATA

INDEX	P0142
MODEL	280W Maxx
Peak Power (Pmax) [W]	280
Maximum Power Voltage (Vmp) [V]	31,70
Maximum Power Current (Imp) [A]	8,83
Open Circuit Voltage (Voc) [V]	38,50
Short Circuit Current (Isc) [A]	9,37
Maximum System Voltage	1000VDC(IEC)
Power Tolerance	+3%
Cell Type	Polycrystalline
Dimensions [mm]	1638x990x30
Weight [kg]	18
Output cables	90cmx2x4mm MC4
Warranty	5 years
Temperature range [°C]	-40 ~ +90
Junction box	IP67
Glass thickness (tempered glass)	3,2mm
Wind load	2400Pa
Snow load	5400Pa

TECHNICAL DRAWING (mm)

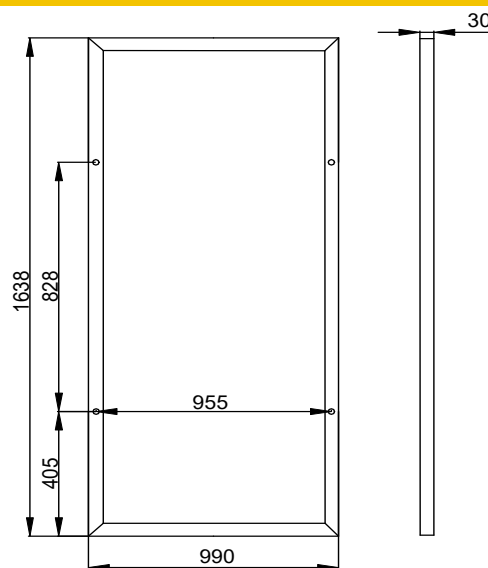

CHARACTERISTIC

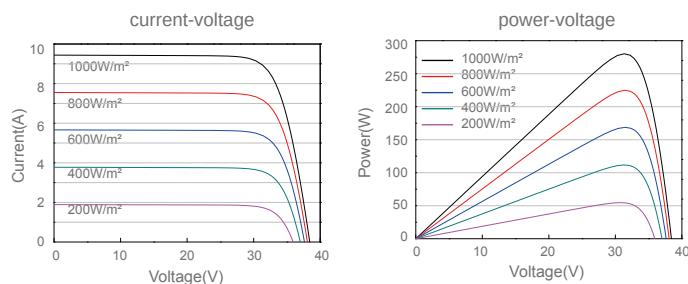

ISO9001
ISO14001
OHSAS18001
IEC TS 62941



BIS



The electrical parameters listed on the product label may differ slightly from the specifications.

4sun®

4Sun sp. z o.o. sp.k.
Annopol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu