

FOLDING SOLAR PANEL

MONOKRYSTALLINE

100W MAXX

12 cells
Monocrystalline

100W
Maximum power



MAXX

TECHNICAL DATA

INDEX	P0213
MODEL	100W Maxx
Peak Power (Pmax) [W]	100
Maximum Power Voltage (Vmp) [V]	20,00
Maximum Power Current (Imp) [A]	5,00
Open Circuit Voltage (Voc) [V]	24,00
Short Circuit Current (Isc) [A]	5,50
Power Tolerance	0~3W
Cell efficiency	>23%
Expand Size [mm]	1093x585x10
Folded Size [mm]	585x545x25
Weight [kg]	2,70
Cable & Connector	2x3m 2,5mm MC4
Operating Temperature	-10°C~70°C
Fabric	900D Nylon
Temperature Coefficients of Voc	-0,36%/°C
Temperature Coefficients of Isc	+0,07%/°C
Temperature Coefficients of Pmax	-0,38%/°C
USB port	YES
Type C socket	YES

DIMENSIONS (mm)



The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be ± 5 mm.



ISO9001
ISO14001
OHSAS18001
IEC TS 62941




BIS



The electrical parameters listed on the product label may differ slightly from the specifications.

CHARACTERISTIC

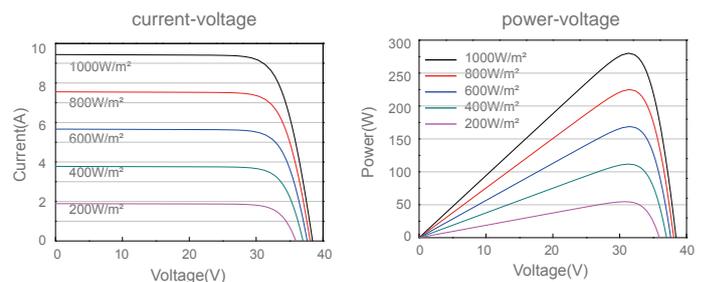

4sun

4Sun sp. z o.o. sp.k.
Annopol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu