

SOLAR PANEL

MONOCRYSTALLINE

4SUN-FLEX-ETFE 100W MAXX

Index: P0052

100W
Maximum power

22%
Cell efficiency

+3%
Power tolerance



- 2-year warranty on workmanship


4sun®

DANE TECHNICZNE

Model	4SUN-FLEX 100W MAXX
Cell Type	Monocrystalline
Peak Power (Pmax) [W]	100
Power Tolerance [%]	+3%
Max. Power Voltage (Vmp) [V]	18,00
Max. Power Current (Imp) [A]	5,55
Open Circuit Voltage (Voc) [V]	21,60
Short Circuit Current (Isc) [A]	5,93
Length [mm]	1185
Width [mm]	540
Depth [mm]	3
Weight [kg]	2,15
Terminal	MC4
Maximum system voltage	600VDC (IEC)
Cables	900mm / 2×2.5mm ²
Terminal	MC4
Working temperature	-40°C ~ +85°C

*Parameters are specified under STC conditions: 1000 W/m²; 25 degrees C; AM 1.5.

TECHNICAL DRAWING (mm)

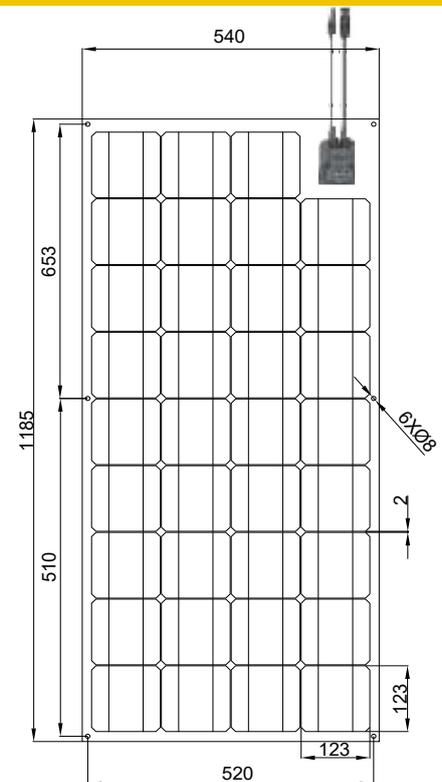

The dimensions given are measured to the center of the mounting hole.
Differences between individual batches may be ±5mm.