

LITHIUM BATTERY 100Ah EPEVER

12V Voltage
100Ah Capacity




MAXX


TECHNICAL DATA

INDEX	B0074
MODEL	100Ah MAXX
Nominal voltage [V]	12,8
Nominal capacity [Ah]	100
Standard terminal	M8
Length [mm]	340
Width [mm]	185
Housing height [mm]	219
Weight [kg]	12,20
Charge cut-off voltage [V]	14,4
Discharge cut-off voltage [V]	10,4
IP class	IP65
Max. charge current [A]	100
Max. discharge current [A]	150
Storage temperature	5°C~+35°C
Communication	Bluetooth


LIFETIME CURVES OF DOD AT 25°C

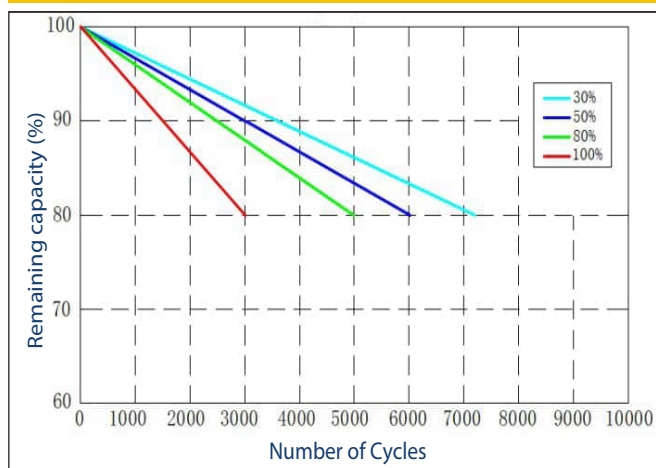



DISCHARGE CHARACTERISTICS

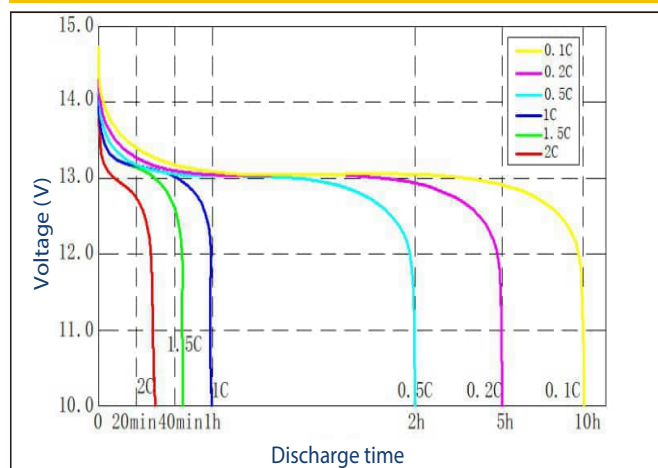

SELF-DISCHARGE CURVE

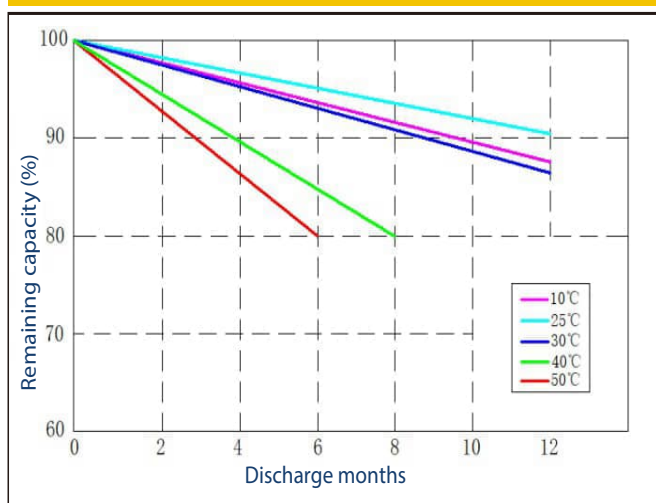

TECHNICAL FIGURE (mm)

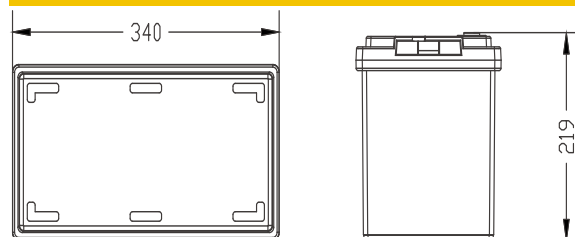

ISO9001
ISO14001
OHSAS18001
IEC TS 62941



The electrical parameters indicated on the product label may differ slightly from the specifications.

4sun

4Sun sp. z o.o. sp.k.

Annopol 4, 03-236 Warszawa

tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu