

SOLAR PANEL

MONOCRYSTALLINE

4SUN-FLEX-M-

ETFE

65W Prestige

Index: P0133

65W

Maximum power

22%

Cell efficiency

+3%

Power tolerance



• 2-year warranty on workmanship


4sun®

TECHNICAL DATA

Model	4SUN-FLEX-M ETFE 65W Prestige
Cell Type	SUNPOWER Monocrystalline
Peak Power (Pmax) [W]	65
Power Tolerance [%]	+3%
Max. Power Voltage (Vmp) [V]	22,00
Max. Power Current (Imp) [A]	2,95
Open Circuit Voltage (Voc) [V]	26,40
Short Circuit Current (Isc) [A]	3,23
Length [mm]	625
Width [mm]	540
Width [mm]	3
Weight [kg]	0,95
Terminal	MC4
Maximum system voltage	600V DC
Cables	900mm / 2×2,5mm ²
Working temperature	-40°C ~ +85°C

*Parameters are specified under STC conditions: 1000 W/m²; 25 degrees C; AM 1.5.

TECHNICAL DRAWING (mm)

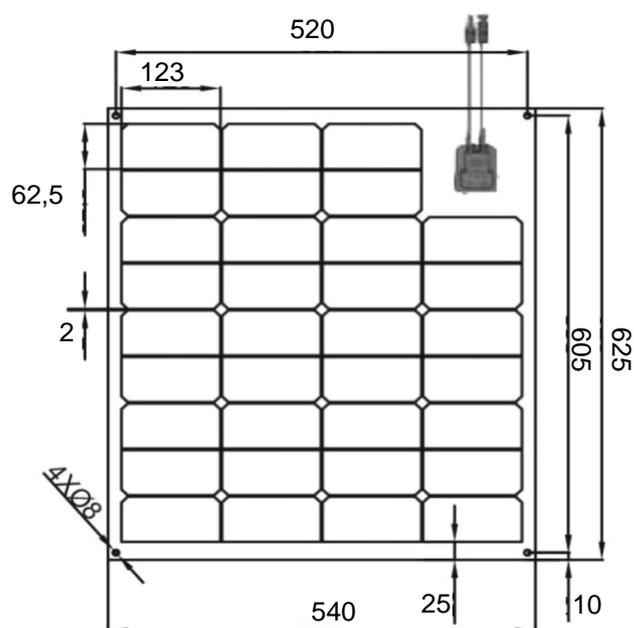

The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be ±5mm.