


# SOLAR PANEL MONOCRYSTALLINE

## 100W MAXX

36 cells  
Monocrystalline

100W  
Maximum power

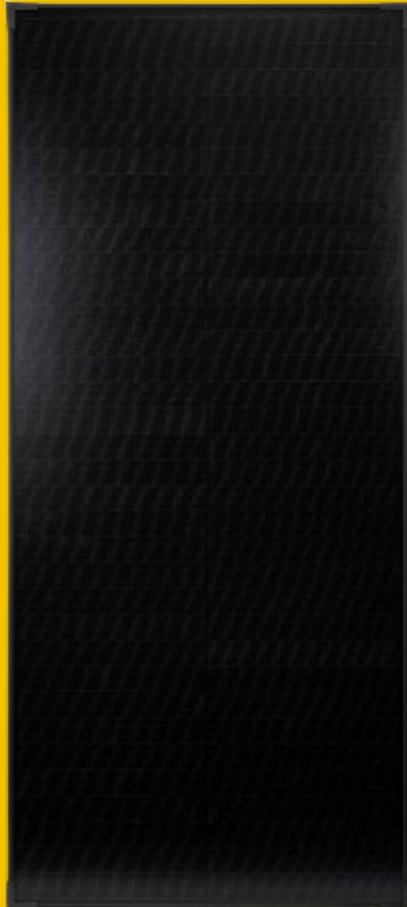


# MAXX

### TECHNICAL DATA

INDEX	P0209
MODEL	100W MAXX
Peak Power (Pmax) [W]	100
Maximum Power Voltage (Vmp) [V]	17,40
Maximum Power Current (Imp) [A]	5,75
Open Circuit Voltage (Voc) [V]	20,96
Short Circuit Current (Isc) [A]	6,18
Maximum System Voltage	1000VDC(IEC)
Power Tolerance	+3%
Cell Type	Monocrystalline
Dimensions [mm]	1160x450x30
Weight [kg]	5,8
Output cables	90x2x2,5mm <sup>2</sup> MC4
Warranty	5 years
Bus Bar	5BB
Junction box	IP67
Front Glass (tempered glass)	3,2mm
Frame	black


### TECHNICAL DRAWING (mm)

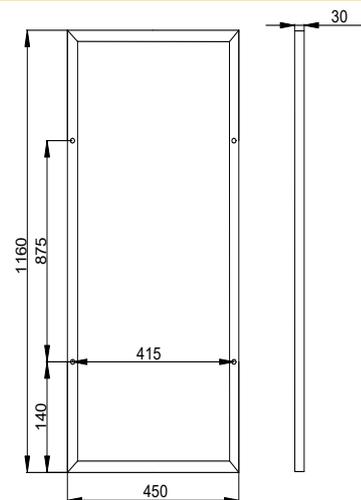

The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be  $\pm 5$ mm.

### CHARACTERISTIC

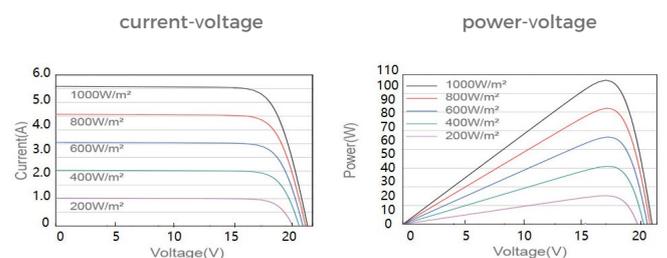

ISO9001  
ISO14001  
OHSAS18001  
IEC TS 62941



BIS



The electrical parameters listed on the product label may differ slightly from the specifications.

4sun®

4Sun sp. z o.o. sp.k.  
Annopol 4, 03-236 Warszawa  
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu