


# SOLAR PANEL MONOCRYSTALLINE

## 30W MAXX

36 cells  
Monocrystalline

30W  
Maximum power

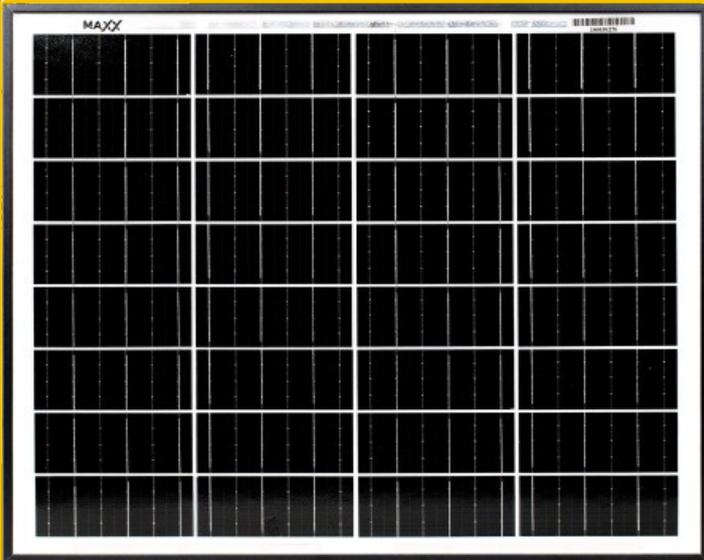


# MAXX

### TECHNICAL DATA

INDEX	P0185
MODEL	30W Maxx
Peak Power (Pmax) [W]	30
Maximum Power Voltage (Vmp) [V]	18,00
Maximum Power Current (Imp) [A]	1,67
Open Circuit Voltage (Voc) [V]	21,60
Short Circuit Current (Isc) [A]	1,82
Maximum System Voltage	1000VDC(IEC)
Power Tolerance	+3%
Cell Type	Monocrystalline
Dimensions [mm]	470x390x25
Weight [kg]	2,80
Output cables	90cm 2x2,5mm MC4
Warranty	5 years
Bus Bar	5BB
Junction box	IP65
Front Glass (tempered glass)	3,2mm
Frame	black


### TECHNICAL DRAWING (mm)

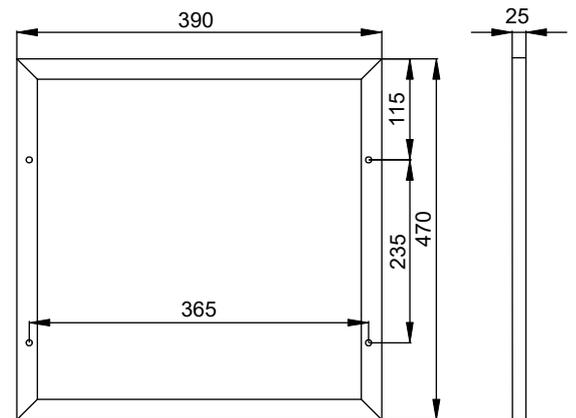

The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be  $\pm 5$ mm.

### CHARACTERISTIC

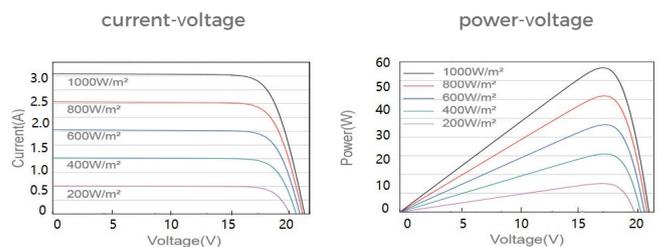

ISO9001  
ISO14001  
OHSAS18001  
IEC TS 62941



BIS



The electrical parameters listed on the product label may differ slightly from the specifications.

4sun®

4Sun sp. z o.o. sp.k.  
Annopol 4, 03-236 Warszawa  
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu