


# SOLAR PANEL MONOCRYSTALLINE

## 60W MAXX

36 cells  
Monocrystalline

60W  
Maximum power

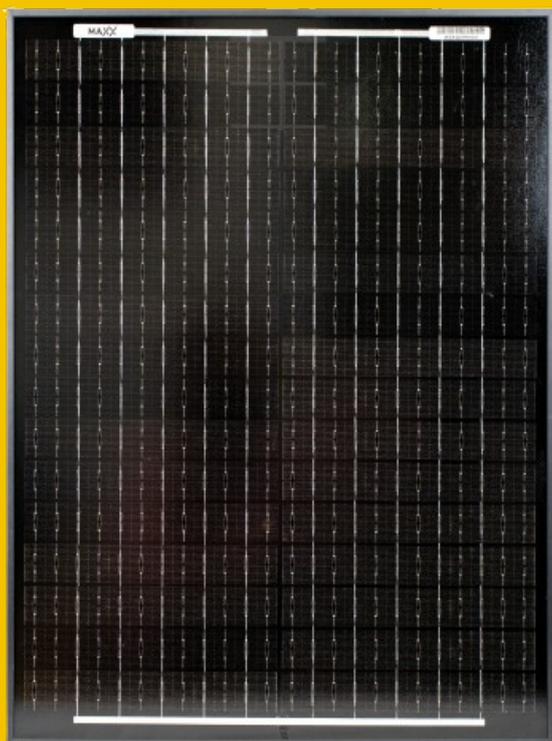


# MAXX

### TECHNICAL DATA

| INDEX                           | P0218            |
|---------------------------------|------------------|
| MODEL                           | 60W Maxx         |
| Peak Power (Pmax) [W]           | 60               |
| Maximum Power Voltage (Vmp) [V] | 19,60            |
| Maximum Power Current (Imp) [A] | 3,06             |
| Open Circuit Voltage (Voc) [V]  | 23,52            |
| Short Circuit Current (Isc) [A] | 3,33             |
| Maximum System Voltage          | 1000VDC(IEC)     |
| Power Tolerance                 | +3%              |
| Cell Type                       | Monocrystalline  |
| Dimensions [mm]                 | 860x380x25       |
| Weight [kg]                     | 4                |
| Output cables                   | 90cm 2x2,5mm MC4 |
| Warranty                        | 5 years          |
| Bus Bar                         | 5BB              |
| Junction box                    | IP65             |
| Front Glass (tempered glass)    | 3,2mm            |
| Frame                           | black            |


### TECHNICAL DRAWING (mm)

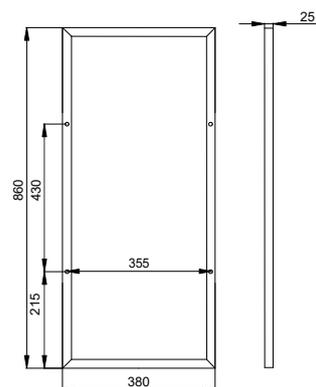

The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be  $\pm 5$ mm.

### CHARACTERISTIC

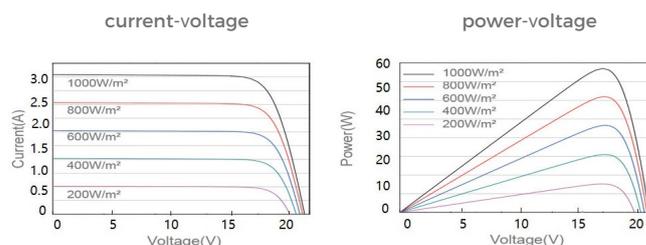

ISO9001  
ISO14001  
OHSAS18001  
IEC TS 62941



BIS



The electrical parameters listed on the product label may differ slightly from the specifications.

**4sun**

4Sun sp. z o.o. sp.k.  
Annopol 4, 03-236 Warszawa  
tel: (22) 114 98 05, email: biuro@4sun.eu

[www.4sun.eu](http://www.4sun.eu)