

GEL BATTERY

9Ah MAXX

12V Voltage
9Ah Capacity




MAXX


TECHNICAL DATA

INDEX	BB0005
MODEL	9Ah MAXX
Nominal voltage [V]	12
Nominal capacity [Ah]	9
Standard terminal	F1/F2
Length [mm]	151
Width [mm]	65
Housing height [mm]	94
Overall height [mm]	100
Weight +/- 3% [kg]	2,4
Cyclic charging [V]	14,4-14,9
Buffer charge [V]	13,5-13,8
Self-discharge within 3 months	91%
Self-discharge within 6 months	82%
Self-discharge within 12 months	64%
Internal resistance [mΩ]	20


BATTERY LIFE

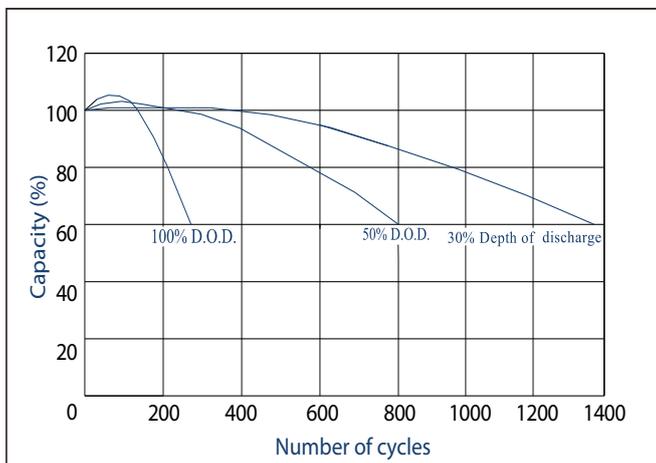


DISCHARGE CHARACTERISTICS

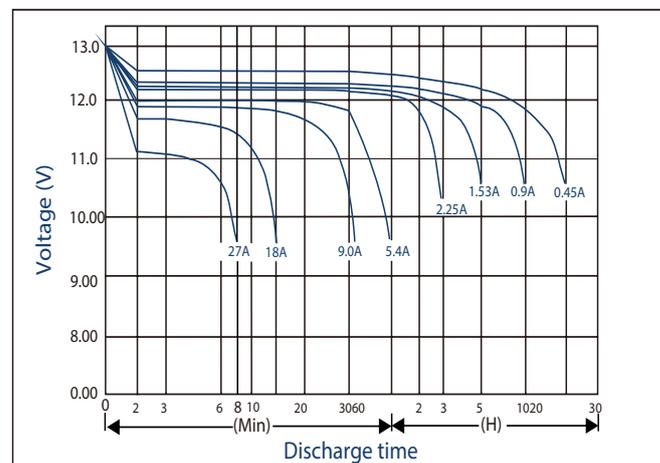

TYPE OF TERMINAL

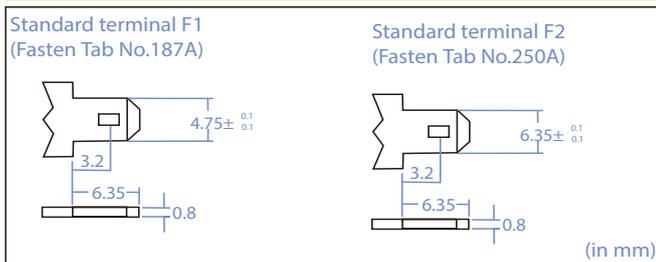

TECHNICAL FIGURE (mm)

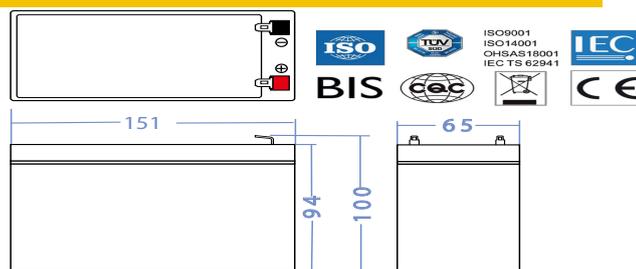

CONSTANT-CURRENT (25°C) CONSTANT-POWER (AT 25°C) DISCHARGE TABLE

time		5min	10min	15min	30min	1h	2h	3h	4h	5h	10h	20h
9,60V	A	34,74	21,98	17,40	9,64	5,94	3,25	2,35	1,88	1,59	0,86	0,46
	W	387,84	247,56	197,70	110,50	68,69	37,85	27,54	22,20	18,93	10,21	5,55
9,90V	A	33,66	21,30	16,95	9,40	5,81	3,21	2,31	1,85	1,58	0,85	0,46
	W	375,91	240,04	192,65	107,75	67,15	37,43	27,13	21,89	18,72	10,18	5,53
10,20V	A	32,13	20,36	16,32	9,15	5,67	3,18	2,28	1,83	1,56	0,85	0,46
	W	358,96	229,48	185,56	105,00	65,61	37,02	26,71	21,58	18,52	10,15	5,51
10,50V	A	30,60	19,41	15,69	8,91	5,54	3,12	2,26	1,81	1,54	0,85	0,45
	W	341,99	218,90	178,46	102,25	64,07	36,40	26,51	21,38	18,31	10,12	5,38
10,80V	A	28,93	18,27	14,79	8,58	5,37	3,05	2,20	1,76	1,49	0,82	0,44
	W	323,39	206,09	168,28	98,46	62,22	35,57	25,78	20,85	17,67	9,82	5,27

The electrical parameters indicated on the product label may differ slightly from the specifications.



4Sun sp. z o.o. sp.k.
Annapol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu