

# GEL BATTERY

## 60Ah MAXX

12V Voltage  
60Ah Capacity




# MAXX


### TECHNICAL DATA

INDEX	BB0010
MODEL	60Ah MAXX
Nominal voltage [V]	12
Nominal capacity [Ah]	60
Standard terminal	T1
Length [mm]	229
Width [mm]	137
Housing height [mm]	205
Overall height [mm]	210
Weight +/- 3% [kg]	16,7
Cyclic charging [V]	14,4-14,9
Buffer charge [V]	13,5-13,8
Self-discharge within 3 months	91%
Self-discharge within 6 months	82%
Self-discharge within 12 months	64%
Internal resistance [mΩ]	9


### BATTERY LIFE

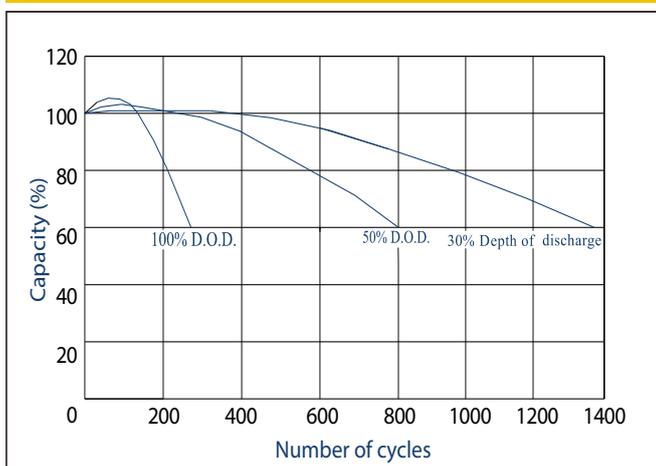


### DISCHARGE CHARACTERISTICS

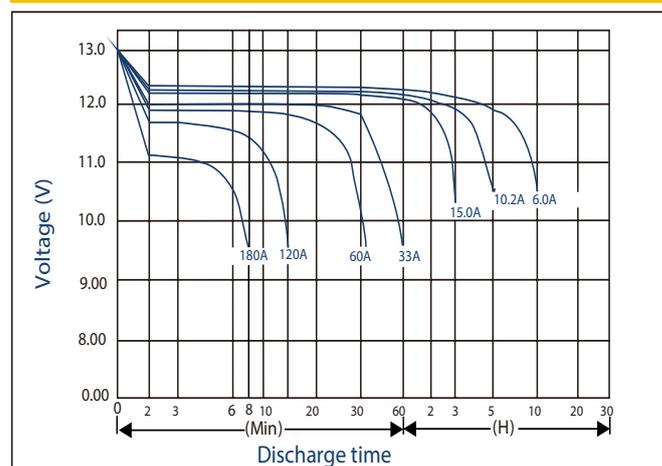

### TYPE OF TERMINAL

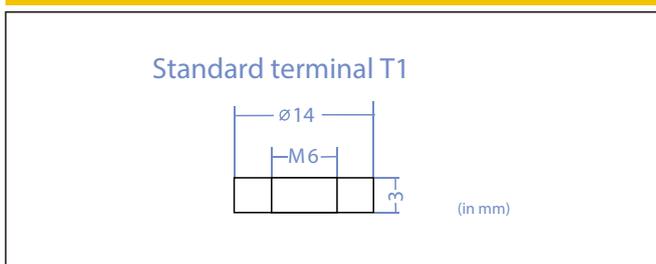

### TECHNICAL FIGURE (mm)

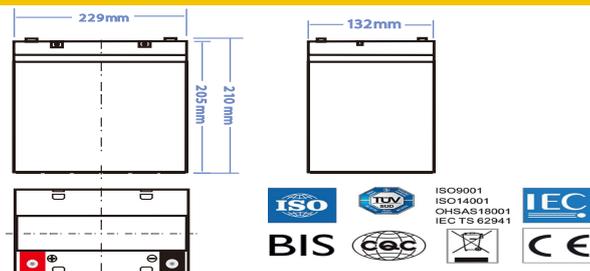

### CONSTANT-CURRENT (25°C) CONSTANT-POWER (AT 25°C) DISCHARGE TABLE

time		10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9,60V	A	126	99	60,0	37,2	21,9	15,3	12,5	10,7	7,3	6,1	3,2
	W	1347	1082	669	422	253	179	147	126	87	72,3	38,4
9,90V	A	122,4	96,6	58,8	36,7	21,8	15,2	12,5	10,6	7,3	6,1	3,2
	W	1313	1060	658	417	251	178	147	125	87	72,6	38,3
10,20V	A	117	93	57,0	35,7	21,6	15,1	12,4	10,6	7,3	6,1	3,2
	W	1260	1024	640	407	250	177	146	125	86	72,0	38,3
10,50V	A	112	90	55,6	34,8	21,3	15,0	12,3	10,5	7,2	6,1	3,2
	W	1212	995	627	398	247	176	145	124	85	72,0	38,1
10,80V	A	106	85	53,6	33,9	20,8	14,6	11,9	10,2	7,0	6,0	3,2
	W	1144	945	606	390	241	171	141	121	83	71,4	37,8

The electrical parameters indicated on the product label may differ slightly from the specifications.



4Sun sp. z o.o. sp.k.  
Annapol 4, 03-236 Warszawa  
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu