

# SOLAR PANEL MONOCRYSTALLINE 220W FB MAXX TOPCON

39 cells  
Monocrystalline

220W  
Maximum power




# MAXX

## TECHNICAL DATA

| INDEX                           | P0219                         |
|---------------------------------|-------------------------------|
| MODEL                           | 220W FB Maxx                  |
| Peak Power (Pmax) [W]           | 220                           |
| Maximum Power Voltage (Vmp) [V] | 22,62                         |
| Maximum Power Current (Imp) [A] | 9,73                          |
| Open Circuit Voltage (Voc) [V]  | 26,52                         |
| Short Circuit Current (Isc) [A] | 10,28                         |
| Maximum System Voltage          | 1500VDC(IEC)                  |
| Power Tolerance                 | 0~+3W                         |
| Cell Type                       | Monocrystalline               |
| Dimensions [mm]                 | 1485x668x30                   |
| Weight [kg]                     | 10,42                         |
| Output cables                   | 90cm 2x4.0mm <sup>2</sup> MC4 |
| Warranty                        | 5 years                       |
| Bus Bar                         | 12BB                          |
| Junction box                    | IP67                          |
| Front Glass (tempered glass)    | 3,2mm                         |
| Frame                           | black                         |


## TECHNICAL DRAWING (mm)

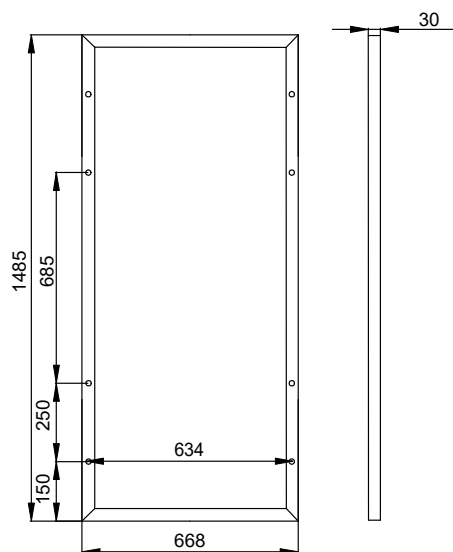

The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be  $\pm 5$ mm.

## CHARACTERISTIC

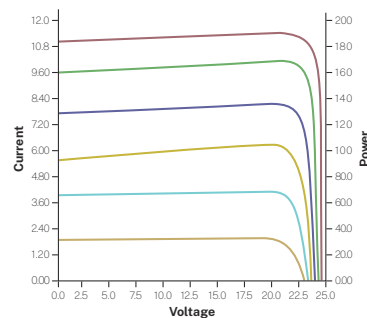

ISO9001  
ISO14001  
OHSAS18001  
IEC TS 62941



BIS



The electrical parameters listed on the product label may differ slightly from the specifications.

**4sun**

4Sun sp. z o.o. sp.k.  
Annopol 4, 03-236 Warszawa  
tel: (22) 114 98 05, email: biuro@4sun.eu

[www.4sun.eu](http://www.4sun.eu)