

SOLAR PANEL

MONOCRYSTALLINE

4SUN-FLEX-M

60WPrestigeNarrow

Index: P0130

60W


Maximum power

22%

Cell efficiency

+3%

Power tolerance

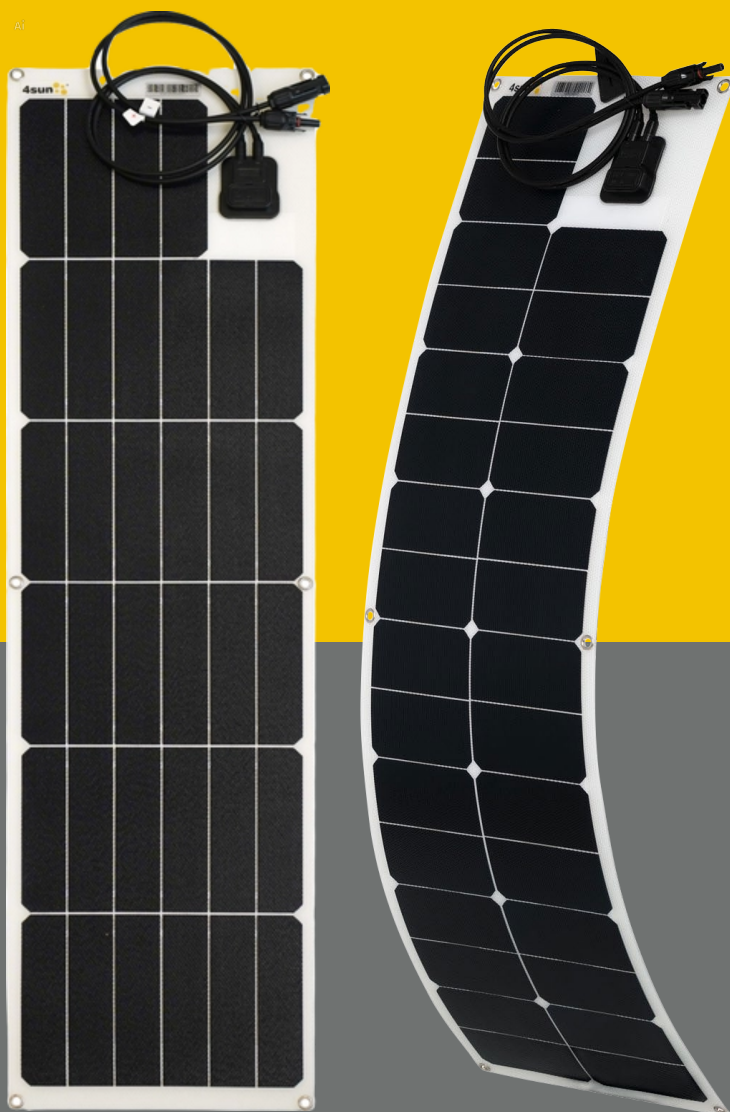

The panel is available in two versions, which differ in the arrangement of the cells

- 2 year warranty on workmanship


4sun®

TECHNICAL DATA

Model	4SUN-FLEX-M 60W Prestige Narrow
Cell Type	SUNPOWER Monocrystalline
Peak Power (Pmax) [W]	60
Power Tolerance [%]	+3%
Max. Power Voltage (Vmp) [V]	19,20
Max. Power Current (Imp) [A]	3,18
Open Circuit Voltage (Voc) [V]	23,04
Short Circuit Current (Isc) [A]	3,44
Length [mm]	1060
Width [mm]	280
Width [mm]	3
Weight [kg]	1,05
Terminal	MC4
Maximum system voltage	600V DC
Cables	900mm / 2×2.5mm ²
Terminal	MC4
Working temperature	-40°C ~ +85°C

*Parameters are specified under STC conditions: 1000 W/m²; 25 degrees C; AM 1.5.

TECHNICAL DRAWING (mm)

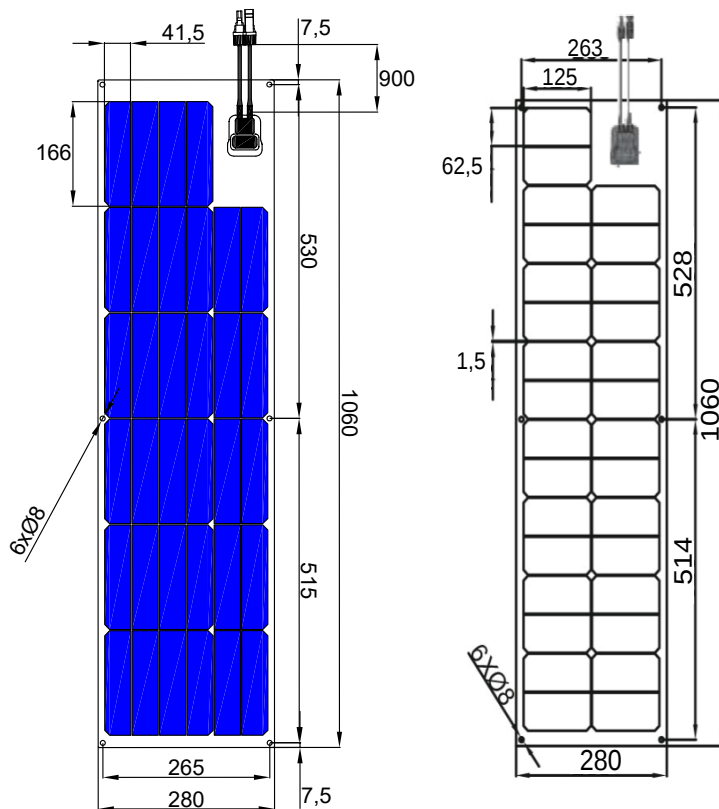

The panel is available in two versions, which differ in the arrangement of the cells

The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be ±5mm.