


SOLAR PANEL POLYCRYSTALLINE

50W-P MAXX

36 cells
Monocrystalline

50W
Maximum power

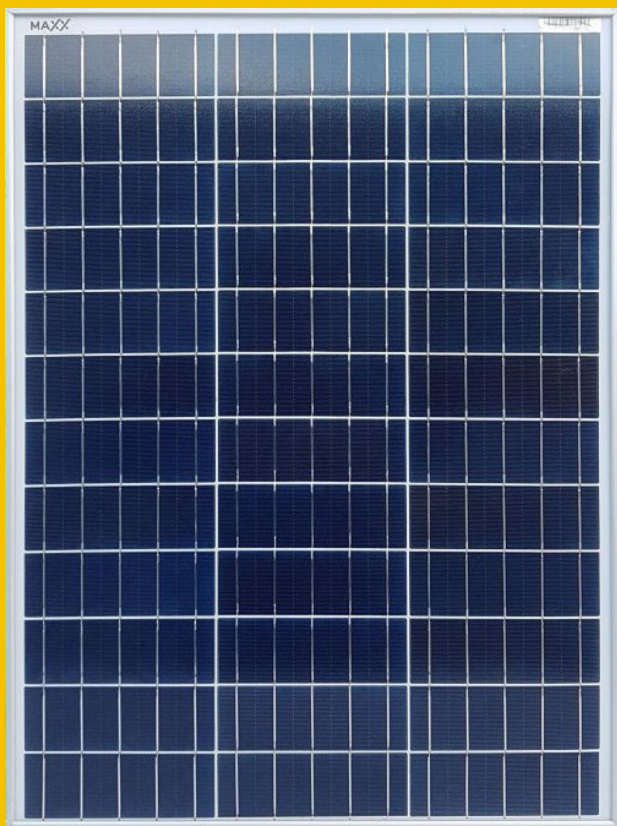


MAXX

TECHNICAL DATA

INDEX	P0084
MODEL TYPE	50W-P MAXX
Peak power (Pmax) [W]	50
Maximum Power Voltage (Vmp) [V]	18
Maximum Power Current (Imp) [A]	2,77
Open Circuit Voltage (Voc) [V]	21,6
Short Circuit Current (Isc) [A]	2,96
Maximum System Voltage	1000VDC (IEC)
Power Tolerance	0 ~ +3%
Cell Type	Polycrystalline
Dimensions [mm]	510x680x30
Weight [kg]	4,8
Output cables	90cmx2x4.0mm MC4
Warranty	5 years
Bus Bar	5BB
Junction box	IP65
Front Glass (tempered glass)	3,2mm
Frame	silver

TECHNICAL DRAWING (mm)

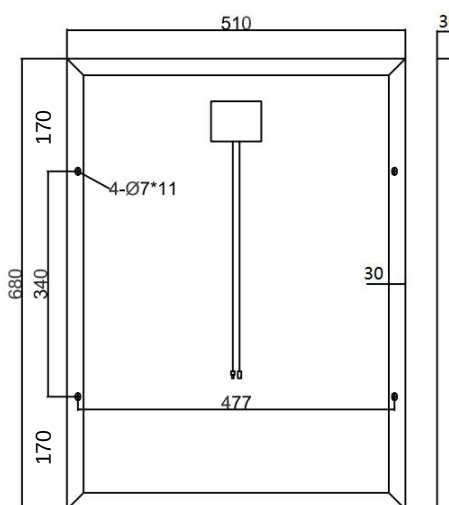

CHARAKTERISTICS




ISO9001
ISO14001
OHSAS18001
IEC TS 62941




BIS



current-voltage



power-voltage



The electrical parameters listed on the product label may differ slightly from the specifications.

4sun

4Sun sp. z o.o. sp.k.
Annopol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu