

SOLAR PANEL MONO BC

480W MAXX

108 cells
Mono BC

480W
Maximum power




MAXX

TECHNICAL DATA

INDEX	PD0004
MODEL	480W Maxx
Peak Power (Pmax) [W]	480
Maximum Power Voltage (Vmp) [V]	34,50
Maximum Power Current (Imp) [A]	13,92
Open Circuit Voltage (Voc) [V]	40,90
Short Circuit Current (Isc) [A]	14,80
Maximum System Voltage	1500VDC
Power Tolerance	±5%
Cell Type	MONO BC
Dimensions [mm]	1762x1134x30
Weight [kg]	21
Output cables	35cmx2x4mm MC4
Warranty	5 years
Temperature range [°C]	-40 ~ +85
Junction box	IP68
Glass thickness (tempered glass)	3,2mm
Frame	black
Wind load	2400Pa
Snow load	5400Pa

TECHNICAL DRAWING (mm)

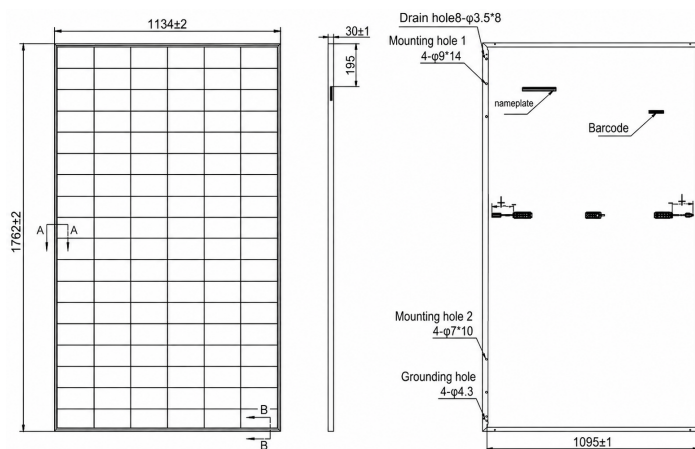



The dimensions given are measured to the center of the mounting hole.

Differences between individual batches may be ±5mm.

CHARACTERISTIC

current-voltage

power-voltage

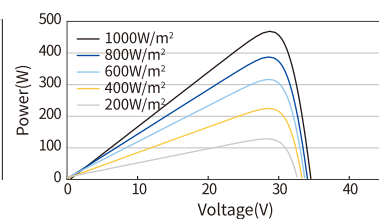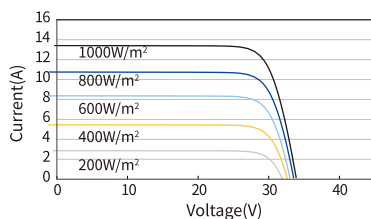

ISO9001 / ISO14001 / ISO45001



The electrical parameters listed on the product label may differ slightly from the specifications.

4sun®

4Sun sp. z o.o. sp.k.
Annopol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu