


# SOLAR PANEL

## MONOCRYSTALLINE

# 170W MAXX

34 cells  
Monocrystalline

170w  
Maximum power

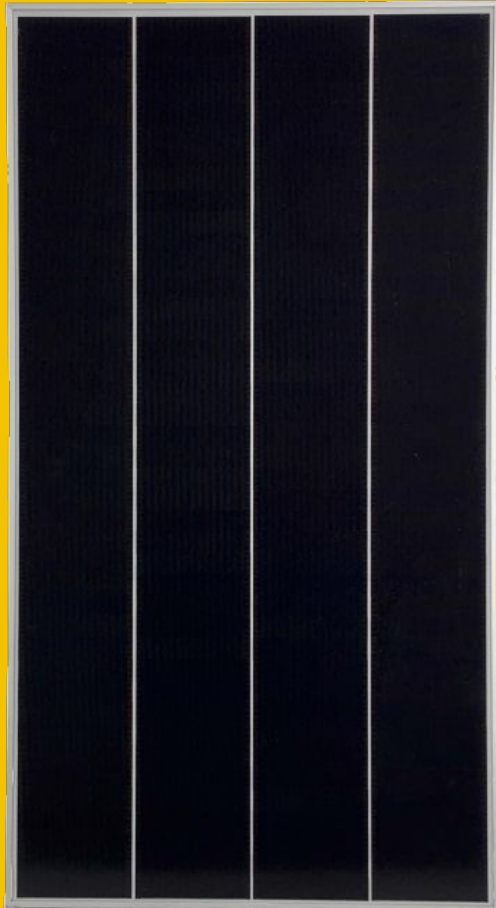


# MAXX


## TECHNICAL DATA

INDEX	P0021
MODEL TYPE	170W MAXX
Peak Power (Pmax) [W]	170
Maximum Power Voltage (Vmp) [V]	20,41
Maximum Power Current (Imp) [A]	8,32
Open Circuit Voltage (Voc) [V]	24,26
Short Circuit Current (Isc) [A]	8,75
Maximum System Voltage	500VDC(IEC)
Power Tolerance	+3%
Cell Type	Monocrystalline
Dimensions [mm]	1230*670*30
Weight [kg]	9,2
Outputcables	70cm 2x2,5mm
Warranty	5 years
Bus Bar	12BB
Junction box	IP67
Front Glass (tempered glass)	3,2mm
Frame	silver

## TECHNICAL DRAWING (mm)

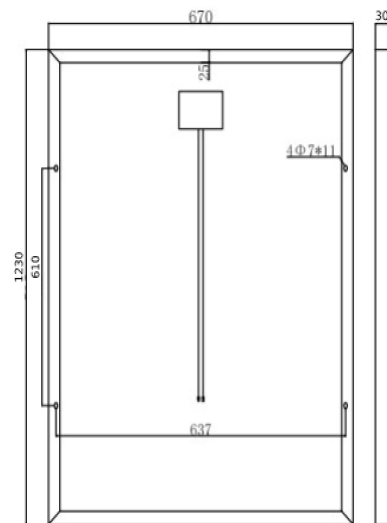

## CHARACTERISTIC

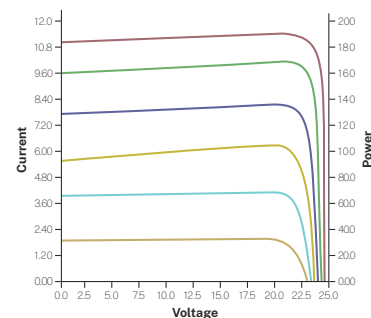

ISO9001  
ISO14001  
OHSAS18001  
IEC TS 62941



BIS



The electrical parameters listed on the product label may differ slightly from the specifications.

# 4sun

4Sun sp. z o.o. sp.k.  
Annopol 4, 03-236 Warszawa  
tel: (22) 114 98 05, email: biuro@4sun.eu

[www.4sun.eu](http://www.4sun.eu)