

# SOLAR PANEL MONOCRYSTALLINE

## 20W MAXX

36 cells  
Monocrystalline

20W  
Maximum power




# MAXX


### TECHNICAL DATA

| INDEX                           | P0201            |
|---------------------------------|------------------|
| MODEL                           | 20W Maxx         |
| Peak Power (Pmax) [W]           | 20               |
| Maximum Power Voltage (Vmp) [V] | 18,65            |
| Maximum Power Current (Imp) [A] | 1,08             |
| Open Circuit Voltage (Voc) [V]  | 22,38            |
| Short Circuit Current (Isc) [A] | 1,17             |
| Maximum System Voltage          | 1000VDC(IEC)     |
| Power Tolerance                 | +3%              |
| Cell Type                       | Monocrystalline  |
| Dimensions [mm]                 | 360x360x25       |
| Weight [kg]                     | 1,90             |
| Output cables                   | 90cm 2x2,5mm MC4 |
| Warranty                        | 5 years          |
| Bus Bar                         | 5BB              |
| Junction box                    | IP65             |
| Front Glass (tempered glass)    | 3,2mm            |
| Frame                           | black            |

### TECHNICAL DRAWING (mm)

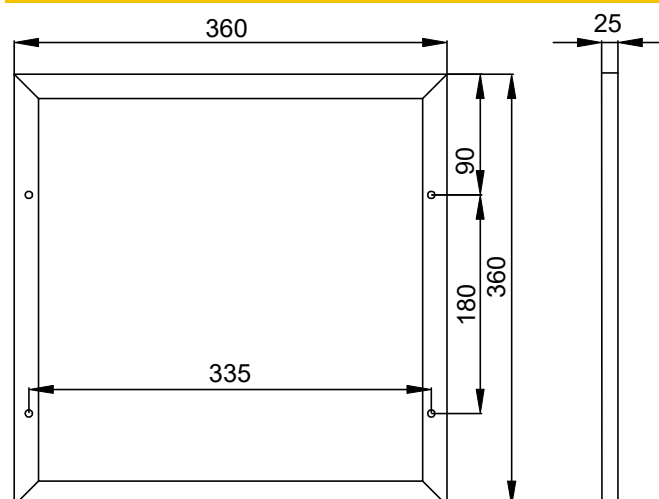

### CHARACTERISTIC

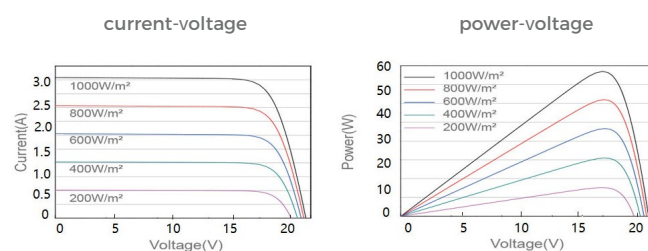

ISO9001  
ISO14001  
OHSAS18001  
IEC TS 62941



BIS



The electrical parameters listed on the product label may differ slightly from the specifications.

4sun

4Sun sp. z o.o. sp.k.

Annopol 4, 03-236 Warszawa

tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu